


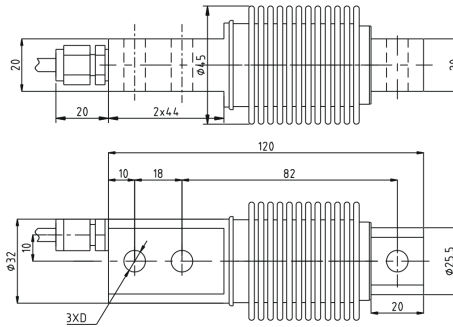






料斗秤、皮带秤、配料系统
Hopper scale,belt scale,blending system

TECHNICAL PARAMETER|

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷Rated load	5,10,20,30,40,50,75,100, 150,200,250,300,500kg	绝缘电阻Insulation resistance	≥5000 MΩ
精度等级 Accuracy class	C3	额定温度 Nominal Temp Range	-10~+40℃
灵敏度Sensitivity	2.0 ± 0.002mV/V	工作温度范围Service Temp Range	-30~+70℃
线性误差 Non-linearity	± 0.02%F.S	安全负载Safe load limit	150%F.S
滞后误差 Hysteresis error	± 0.02%F.S	破坏负载Breaking load	200%F.S
蠕变 (30分钟) Creep(30min)	± 0.015%F.S	额定激励电压Nominal of range excitation	10~12V DC
零点温度影响TC ZERO	± 0.015%F.S/10℃	密封等级Protection Class	IP68
灵敏度温度影响TC SPAN	± 0.015%F.S/10℃	材料Material	合金钢Alloy Stell
输入阻抗Input resistance	400 ± 20Ω		不锈钢Stainless Stell
输出阻抗Output resistance	352 ± 3Ω	电缆Cable	Length:3m

总装D模块 (Diagram D)





径向安装 Radial installation

切向安裝 Cutting installation



矩形安装 Rectangle installation

总装B附件



量程 (kg)	D	M
5,10,20,30,40 50,75,100,150,200,250	ø8	M8
300,500	ø10	M10

总装E附件



量程 (Kg)	尺寸 (mm)	D
5,10,20,30,40		ø8.2
50,75,100,150,200,250		ø10.2
300,500		ø12.2

总装C附件

