

Specifications

Model	AB 323	AB 623	AB 1202	AB 3202	AB 12001
Capacity	320g	620g	1200g	3200g	12000g
Readability (d)	0.001g	0.001g	0.01g	0.01g	0.1g
Repeatability (sd.)	0.001g	0.001g	0.01g	0.01g	0.1g
Non-Linearity (typ.)	±0.003g	±0.004g	±0.02g	±0.03g	±0.2g
Stabilization time (typ.)	3.0 sec.	3.5 sec.	3.0 sec.	3.5 sec.	3.0 sec.
Pan size	140mm dia		190×190mm		
Calibration	External				
Output	RS232C				
Dimension	293×202×206mm *1		293×196×89mm		
Weight	approx.3.5kg		approx.2.6kg		

^{*1} including windshield





VIBRA AB series provides basic applications which are indispensable in daily work in laboratory and industrial lines. In any applications highly precise measurement is promised. VIBRA AB series is the best affordable entrance into high-grade weighing solution.



User-friendly: Key to efficient daily works

VIBRA AB series is equipped with features to make routine measurement works easy and comfortable. Large back-lit LCD is easy to read in any locations. Glass winshield prevents air turbulance from disturbing weighing operaton in tough environment.



Connection to outside devices

VIBRA AB series has RS232C output as standard. When you



Standard printer CBM-910 II ▲

need to print the weighing data and/or store it in outside devices, you can easily connect VIBRA AB seriess to PC, printer, etc... through RS232C output.

Option & Peripherals

CBM-910 II	Standard printer
CSP-160 II	Statistics printer
SDI	Satellite display

Common specifications


Measuring system: Tuning-fork frequency sensing

Tare: Full weighing range

Display: LCD with backlit (16.5mm height)
Windshield: Glass windshield (AB323 & AB623)

VIBRA

Dimensions

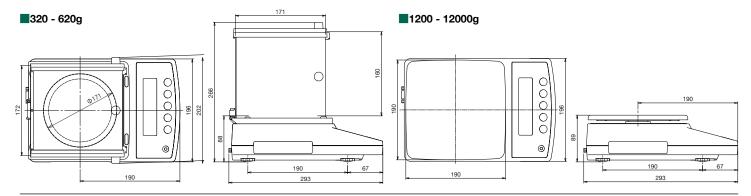

SHINKO DENSHI CO., LTD.

SHINKO DENSHI CO., LTD.

3-9-11 YUSHIMA, BUNKYO-KU, TOKYO 113-0034

TEL: 81-3-3835-4577 FAX: 81-3-5818-6066

URL: http://www.vibra.co.jp/global/ E-mail: shinko-denshi@vibra.co.jp

